



CDN M3, 32 A from 150 kHz CDN IEC 61000-4-6

IEC /EN 61000-4-6 specifies the design and performance of a range of coupling / de-coupling networks (CDNs). Each CDN is specific to the type of cable and the intended signal carried on the cable. AMETEK CTS with its brand TESEQ offers an extensive range of CDNs which fully comply with the requirements of the standard and provide a simple and reliable method of injecting RF energy into the equipment under test (EUT). In this datasheet, CDN used with unscreened supply (mains) with three line applications with maximum of 32 A starting from 150 kHz as required by IEC /EN 61000-4-6 is presented.

MAIN FEATURES

- Coupling networks designed for IEC/EN 61000-4-6
- CDN M series for mains applications
- Models with frequency range 150 kHz to 230 MHz or to 80 MHz
- for 3 Lines application
- Models with 4 mm safety banana sockets
- with maximum current of 32 A

The CDN M3 series is used to Inject common mode disturbance signal to supply lines for one line applications (with neutral and PE line), for two lines applications (with only PE) or for three lines applications in the frequency range from 150 kHz to 230 MHz.

Verification results is supplied with each unit. Traceable and accredited calibration according to ISO17025 is available upon request. The CDN can be ordered alone or as a kit, which includes the necessary adapters for verification. please refer to the set order information for more details.



For safety, AMETEK provides a protective earth bolt attached to the bottom plate of all CDN series which can be used to connect it with ground. Furthermore, CDN series comes with a safety banana socket to avoid accidental contact with the metal socket.

Typical performance with limit lines for common mode impedance and voltage division factor can be found in this datasheet.

Electrical Specifications

	CDN M332	CDN M332-3L	CDN M332A	CDN M332A-3L	CDN M332-1000V	CDN M332-3L-1000V
Frequency Range	150 kHz to 230 MHz				150 kHz to 80 MHz	
Connector EUT Port	4 mm safety banana					
Connector AE Port						
Line Parameters	3 power lines					
Application Configuration	(L+N+PE) (2L+PE)	(3L)	(L+N+PE) (2L+PE)	(3L)	(L+N+PE) (2L+PE)	(3L)
AC max. voltage (L-N) / (L-L)	300 V / 520 V				500 V / 1000 V	
DC max. voltage (L-N)/ (L-L)	400 V / 600 V				1000 V / 2000 V	
Current Max	32 A					
Test Voltage, 2 sec.	3.1 kVDC				4.7 kVDC	
Common Mode Impedance (EUT Port)	150 kHz to 24 MHz: 150 Ω ±20 Ω 24 MHz to 80 MHz: 150 Ω +60 Ω / -45 Ω 80 MHz to 230 MHz: 150 Ω ±60 Ω				150 kHz to 24 MHz: 150 Ω ±20 Ω 24 MHz to 80 MHz: 150 Ω +60 Ω / -45 Ω	

Typical Performance for Common Mode Impedance and Voltage Division Factor

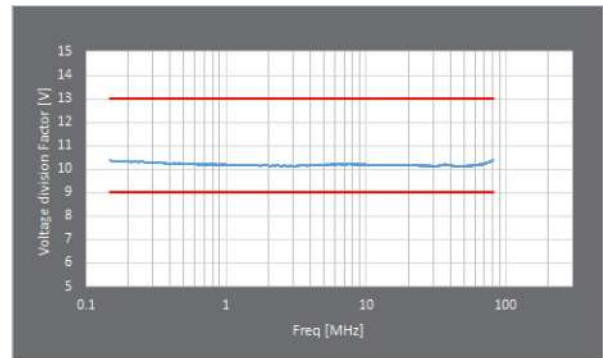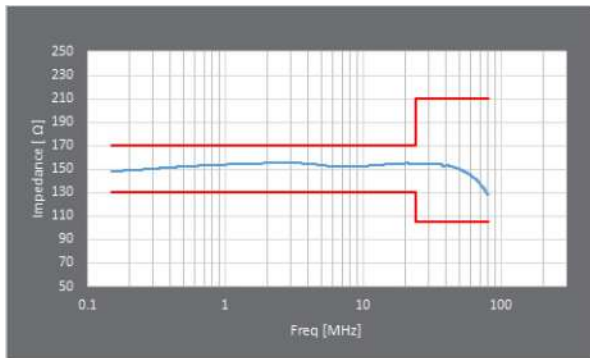

RF to EUT/AE Specifications

	CDN M332	CDN M332-3L	CDN M332A	CDN M332A-3L	CDN M332-1000V	CDN M332-3L-1000V
RF Port	BNC 50 Ω					
RF Voltage	< 30 V ¹		< 50 V ²		< 30 V ¹	
Voltage division factor (RF input to EUT port)	150 kHz to 230 MHz: 10 dB +3 dB / -1 dB		150 kHz to 230 MHz: 10 dB ±2		150 kHz to 80 MHz: 10 dB +2 dB / -1 dB	
Insertion loss (EUT / AE)	f < 400 Hz: <0.1 dB					
Decoupling of CM disturbance (RF port / AE) typ.	150 kHz: >20 dB 1.5 MHz: >50 dB 30 MHz: >50 dB 230 MHz: >20 dB		150 kHz: >20 dB 1.5 MHz: >50 dB 30 MHz: >40 dB 230 MHz: >20 dB			
Footnote	1. refers to 50 V test level in 300 Ω / 2. refers to 83 V test level in 300 Ω					

General Specifications

	CDN M332	CDN M332-3L	CDN M332A	CDN M332A-3L	CDN M332-1000V	CDN M332-3L-1000V
Dimensions (WxHxD)	160 x 160 x 470 mm ³		203 x 203 x 470 mm ³		160 x 160 x 470 mm ³	
Net Weight	approx. 6.5 kg		approx. 7.8 kg		approx. 6.5 kg	
Operating Environment	Indoor use only					
Operating Temperature	+5°C to +40°C					
Humidity	up to 80%					

Set Information

	CAL U100B 247825	A 50-N 257521	SAR M116 239915	SAR M300 242451	SAR MA31 247828
CDN M332S 244292	2	1	1	1	1
CDN M332-3LS 256660	2	1	1	-	2
CDN M332-1000VS 256673	2	1	1	1	1
CDN M332-3L-1000VS 256751	2	1	1	-	2