


HR-E 40-1

E-Field Probe up to 40 GHz

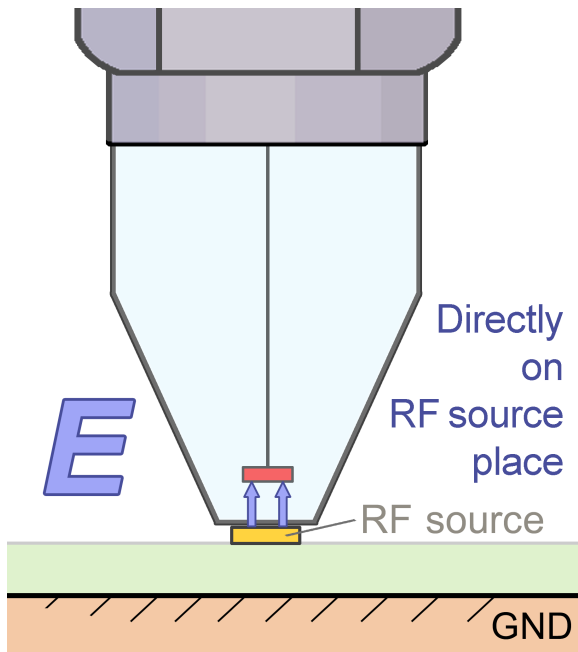


Short description

The HR-E 40-1 is a passive near-field probe for measuring electric fields up to 40 GHz. The measuring tip is decoupled from the cable shield by special damping systems. In addition, the probe contains a current attenuator.


Technical parameters

upper cut-off frequency	40 GHz
lower cut-off frequency	depending on measuring device
Resolution	0.2 mm
Inner distance of the measuring electrode to the measuring tip	0.5 mm
Output resistance	50 Ω
Connector - output	2.92 mm (K), female, jack
Weight	19 g
Sizes (L x W x H)	(145 x 9 x 9) mm

Frequency response

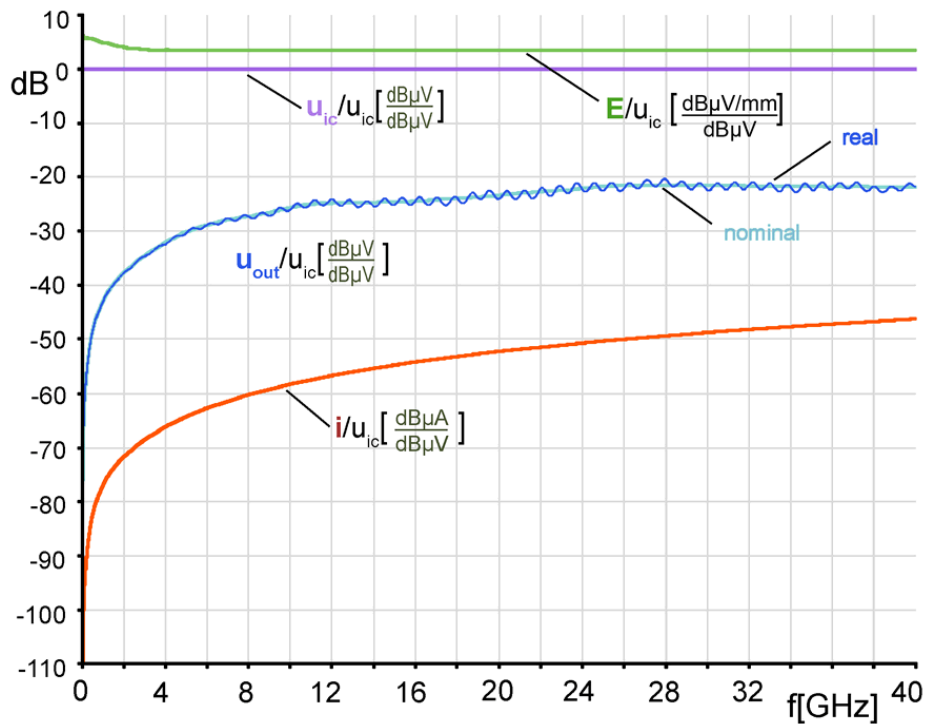

Correction curve

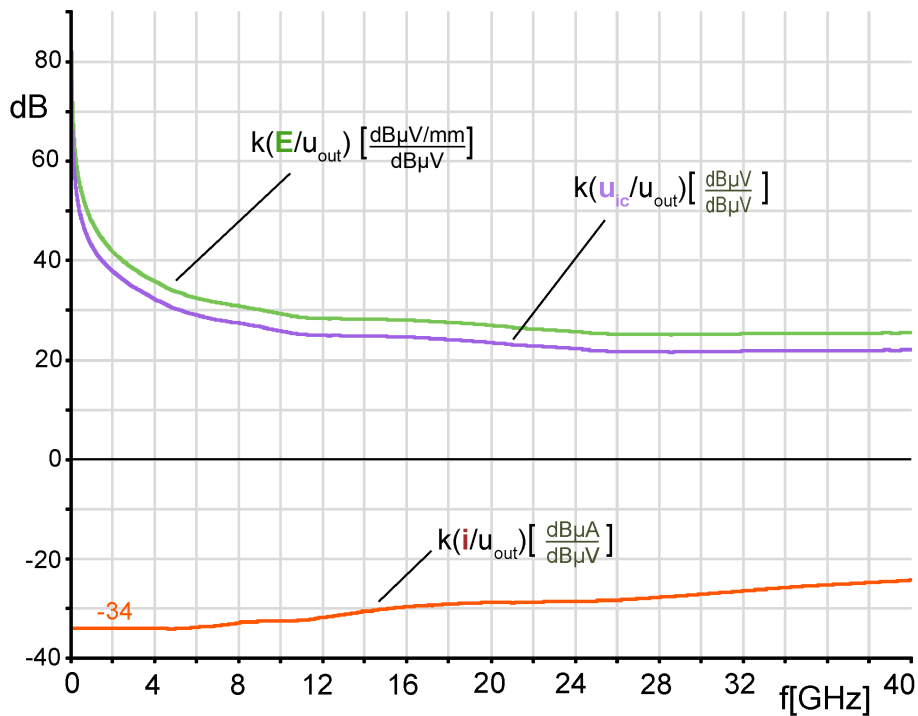


HR-E 40-1

E-Field Probe up to 40 GHz

LANGER
EMV-Technik

Measuring principles

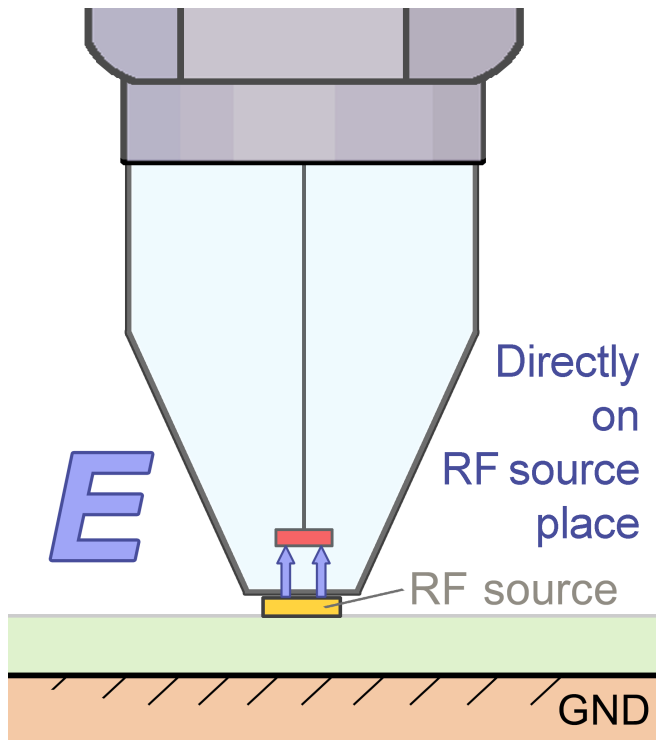

HR-E 40-1 E-field probe head



HR-E 40-1

E-Field Probe up to 40 GHz

HR-E 40-1 E-field probe in application

